



ROUND ASSEMBLY

Positioning

To ensure maximum enjoyment and efficiency, consider the following steps when selecting the desired location of your pool.

- Select a location that receives maximum sunlight for increased heat and extended use.
- Select a location with as little wind exposure as possible to minimize heat loss.
- Be aware of the amount of trees and shrubbery around your pool to limit the amount of debris.
- Select a location with accessibility to water and electric sources.
- Consider privacy when selecting a location.

Ground Preparation

NOTE: PLEASE REVIEW ATTACHMENT (#1) FOR POTENTIAL “SOFT GROUND” INSTALLATIONS.

- The surface the pool is to be assembled on, must be firm and level. The pool must be installed as level as possible, within 2”- 3” of level (from the highest point to the lowest point of the pool). If you are going to be 2”- 3” off level, be sure to install the skimmer on the lower side to ensure your skimmer will not suck air into the pump.
- If the ground is not level, take the earth from the high side of the surface; do not add earth to the lower area of the surface.
- Once the surface is level, clear any debris or sharp objects that may be uncomfortable to walk on, or could potentially puncture the liner. A foam flooring may be added under the liner for additional comfort. *See your dealer for details.*
- The supporting legs burden much of the weight of the pool and may need additional support in “soft ground” installations, or in areas that may experience excess ground water. A 2”x 8” x 22” piece of lumber installed under each support leg and leveled with the ground is very effective. Make sure the entire base of each leg is on the 2” x 8” lumber; any over-hang may result in bending of the leg. A concrete slab (not a paver) of the similar dimensions may be used as well. Please note that any support(s) added under the pool structure must be sunk so that the top of the support is level with the ground surface. Lifting the legs or frame in any manner may cause excessive stress on the liner and frame, and may void the pool warranty.

Parts For Assembly

Your pool is comprised of various parts according to the size and model selected. Therefore, before proceeding with installation, ensure that all necessary parts are present, and group like parts.

- One Blue liner (Letter A) w/ corresponding number of hooks, as straps along bottom
- 120 cm tubes (Letter B)
- 115 cm legs (Letter C) w/one white top cap and two white bottom caps per leg
- Parts bag containing instructions, gloves, patch kit, and quick disconnect springs.
- Each pool will contain the following number of part B and part C components: 13' round contains 10, 15' round contains 12, 20' round contains 16, and the 24' round contains 19.

Pool Assembly

- Unfold and spread out liner (A) on prepared area.
- Align (C) legs with cut outs at top of liner. Each leg will need (2) bottom caps to enclose the bottom of the leg & (1) top cap, in which the tubes (B) are placed.
- Slide (B) tubes through sleeves at top of liner.
- Connect (B) tubes and (C) legs. ***Ensure that the tips of the (C) legs are pointing away from the liner.***
- Hook (C) legs to straps at bottom of liner. Using the provided hooks, loop through the strap and then line up the tips of the hook with the holes on the front of the legs.
- While pool is filling make sure the legs and top rails stay in proper position until pool is at least $\frac{1}{4}$ full.

Skimmer Assembly (see Attachment #2)

- Align and place the skimmer face plate on the front of skimmer and affix by using provided screws.
- Attach the enclosed Skimmer Rail Hook by lining up the hook with pre-drilled holes and attaching with the enclosed Nuts and Bolts (#13).
- Snap in Weir door, add basket and push the lid into place. Only use the included skimmer plate if using a Vacuum or Suction Cleaning system (i.e. Starfish, Aqua Bug, etc...)

Connecting Skimmer Wall Fitting (see Attachment #2)

- USE THE LOWEST PRE-CUT LINER PORT FOR THE SKIMMER (#2)
- Push fitting (#8) thru the wall of the pool (#2) from the inside. MAKE SURE TO USE A GASKET (#9) on both sides of the wall of the pool. Secure the wall-fitting nut (#10) to (#8) now sticking out of the wall of the pool. Again, make sure to have a gasket (#9) on both sides. Tighten with a large pair of channel locks. Make sure the nut is very snug but do not over-tighten, as this may crack your fitting.
- Thread the male portion on the Male Adaptor (#3) into the bottom of the skimmer. Thread the male portion of Male Adaptor (#7) into the wall fitting (#8).
- Press the longer connection pipe (#4) into the skimmer fitting (#3) then press the other end of the pipe (#4) into the elbow fitting (#5). Press the shorter connection pipe (#6) into the elbow fitting (#5) then press the other end of the pipe into the Male Adaptor fitting (#7),


- already in the wall of the pool. *Note: You may have to lift slightly on skimmer to make this connection.*
- Thread the provided slide valve (#11) into the wall fitting (#10) then; make sure the gasket is in place and the Union Nut is securely fastened to the body of the valve then; thread the male portion the threaded 90 (#5) into the Tailpiece of the slide valve (#11). (Use provided Teflon Tape on threads in this step) (see below)

Attachment #2

Round Pool Skimmer Diagram

Part List


- (2) Threaded Male Adaptor (#3,7)
- 8 1/2" Connection Pipe (#4)
- 6 1/2" Connection Pipe (#6)
- 90° Elbow (#5)
- Wall Fitting (#8)
- Wall Fitting Nut (#10)
- (2) Wall Fitting Gaskets (#9)
- Thr. 90° Elbow (#12)
- Skimmer Rail Hook w/ two bolt and nuts (#13)
- Slide Valve w/ Union Nut, Gasket and Tailpiece (#11)

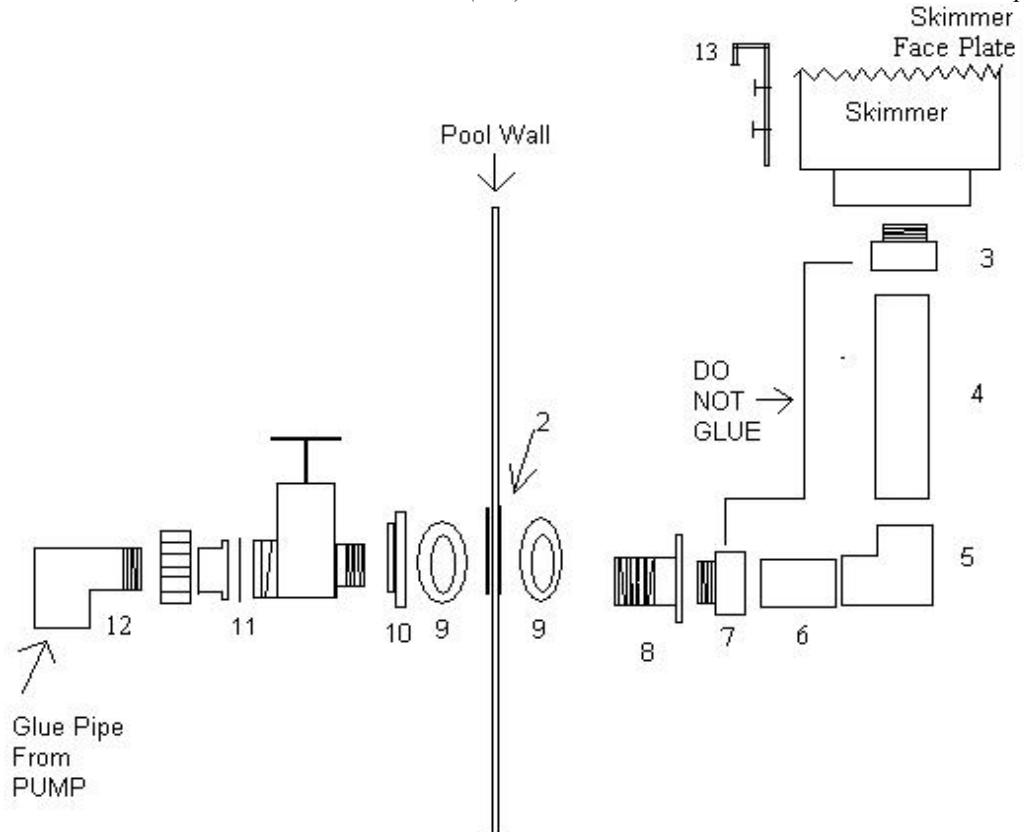

Connecting Return Wall Fitting (see Attachment #3)

- USE THE HIGHEST PRE-CUT LINER PORT FOR THE RETURN (#2)
- Push fitting (#8) thru the wall of the pool (#2) from the inside. **MAKE SURE TO USE A GASKET (#9)** on both sides of the wall of the pool. Secure the wall-fitting nut (#10) to threaded portion now sticking out of the wall of the pool. Again, make sure to have a gasket (#9) on both sides. Tighten with a large pair of channel lock. Make sure the nut is very snug but do not over-tighten, as this may crack your fitting.
- Thread the provided slide valve (#11) into the wall fitting (#10) then; make sure the gasket is in place and the Union Nut is securely fastened to the body of the valve (#11) then; thread the male portion the threaded 90 (#5) into the Tailpiece of the slide valve (#11) (Use provided Teflon Tape on threads)

(Attachment #3)
Round Wall Fitting Diagram

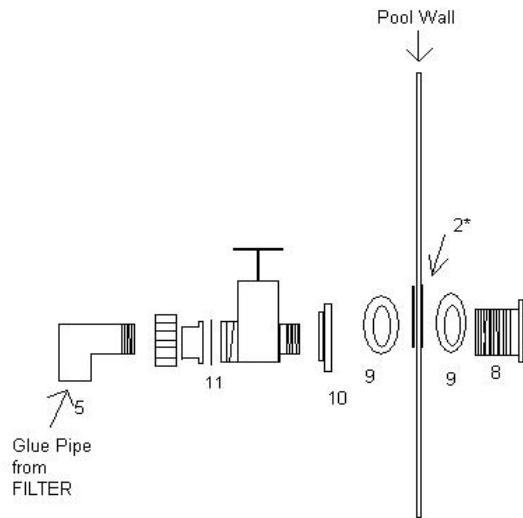

Plumbing from Wall Fittings to Equipment

- Thread the two male adaptors (provided with the plumbing kit) into your equipment package. One into the pump pot and the other into the return port of the filter. This step varies depending on type of equipment. *Note: Some equipment may come ready to glue into or provide slip fittings for you, therefore the provided adaptors may not be needed.*
- Cut the provided 25' of flexible PVC to length measuring from the skimmer fitting (#12) to the pump side of the equipment and then from the return fitting (#5) to the filter side of the equipment. Use the provided glue to secure to the fittings. *Note: Be sure to cut enough pipe so that the pipe lays on the ground. Do not pull the pipe tight from pool to equipment. Press and hold glued connections for at least 20 seconds.*

Placarting your pool

- Place the included (8) ***no diving into pool/keep children supervise at all times*** stickers on all four sides your pool on the inside and outside top rail area of your liner.

Caring for your Pool

- Pre-dissolve all dry chemicals before putting them into the pool. Failure to do so may result in bleaching or damaging your liner. Always have your pool running when adding chemicals, liquid or dry.
- Keep water balanced within NSPI standards for vinyl liner pools (**see your local pool and spa retailer for details**). Care of a Kona Pool is the same as any Above Ground Vinyl Lined Pool.
- Do not leave pool set up while empty.
- Do not leave pool filled with water without proper chemical treatment and pool maintenance.

- Take the pool down if in an area where harsh winter weather occurs. If you only close the pool know that “Winterizing” is specific to the climate the pool is located in. Kona Pools require no special preparation for the off-season. Kona Pools are treated the same as any other Above Ground Pool. “Winterizing” generally refers to the treatment of the water in the pool, draining below the ports and draining your equipment, again the pool itself requires no special attention. Visit your local pool store and tell them you would like to “Winterize” or “Close” your Above Ground Pool for the season. They will be able to get you what you need and instruct you based on your location's climate, again **see your local pool retailer for details.**
- If you DO choose to winterize, you must drain the pool below all wall fittings and view ports (if applicable).
- When storing your pool, thoroughly clean and dry liner and carefully roll up. Store your pool in a dry safe place. Always store the hard parts and the liner in separate boxes.

NO DIVING into pool!
Keep children supervised at *ALL* times!